

EOS Moment Control W

Sauna heater with integrated control unit. Wall-mounting model.

Sauna heater with built-in control unit and temperature sensor for dry (Finnish) sauna cabins. Perfect balance between strong air convection and a large rock volume up to 15 kg stones.

Recommended for private sauna cabins from 7 m^3 to 14 m^3.



Your advantages:

- Very simple and easy to use thanks to the integrated control.
- Integrated sensor – no separate installation, only power supply connection needed.
- Optimized construction with the well balanced air convection performance and 15 kg stone volume.
- Contemporary, timeless design with the elegant black finish housing and brushed steel top.
- Durable, robust construction – top, inner shell and rock store made of stainless steel.
- Made in Germany quality from EOS

Specifications:

Outer shell:	Zinc-plated steel, with black finish (powder coating)
Inner shell:	Stainless steel
Cover / Rock store:	Stainless steel
Terminal box:	zinc-plated steel, in the bottom of the heater
Power output:	7.5 kW and 9.0 kW
Connection:	400 V 3N ~ 50 Hz
Dimensions: (H x W x D) :	640* x 440 x 330 mm (*860 mm at 220 mm floor gap)
Rock store volume:	approx. 15 kg (Stones optionally available)
Installation:	wall-mounted heater




Built-in control unit

Heating time limit:	4 h
Control range:	40-100 °C


CE EAC UK CA IPx4 Made in Germany

EOS Saunatechnik GmbH | Schneiderstriesch 1 | 35759 Driedorf | Germany | Tel. +49 (0) 2775 82 - 0 | www.eos-sauna.com | info@eos-sauna.de


Connection overview

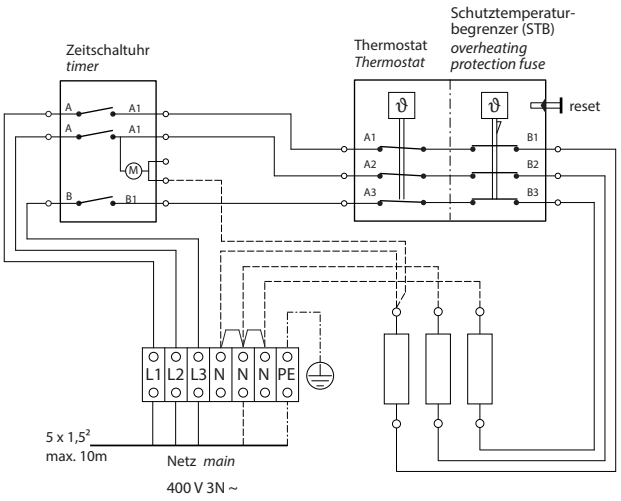


Minimum clearances

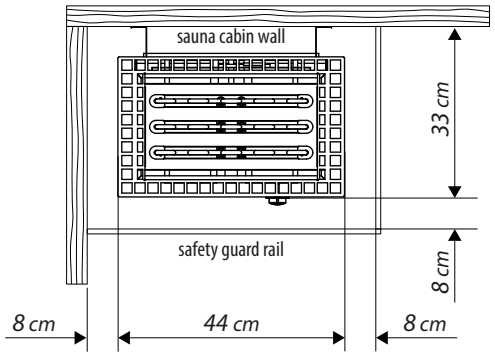

Installation example

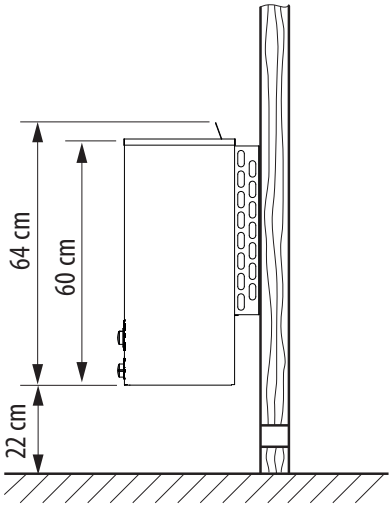

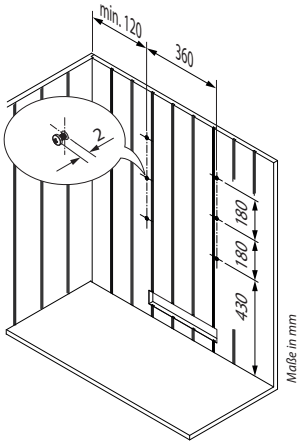

Spare heating elements

Description	Item no.
Heating element for 7,5 kW (3 x 2500 W)	2001 6500
Heating element for 9 kW (3 x 3000 W)	2001 6501

Specifications

Item no.	Power output	Electrical connection	Fuse protection	Dimensions H/W/D, in cm	For sauna cabin size	Min. size air inlet and outlet	Weight withouth rocks	Connection heater - mains	Temperature control range	Power extension required
94 7581	7,5 kW	400 V 3N ~ 50 Hz	3 x 16 A	64 / 44 / 33 (86*)	7 - 10 m³	35 x 5 cm	13,5 kg	5 x 1,5 mm² max. 10 m	40 - 100 °C	no
94 7582	9,0 kW				9 - 14 m³	35 x 6 cm				

* Installation height at 22 cm gap FFL.

All cross sections of a line are minimum diameters in mm² (copper wire), make sure to observe 15 cm ground clearance.

Druck-Nr.: 29344944 46.22

Technical changes reserved

EOS Saunatechnik GmbH | Schneiderstriesch 1 | 35759 Driedorf | Germany | Tel. +49 (0) 2775 82 - 0 | www.eos-sauna.com | info@eos-sauna.de